LIGHT FIXTURE INSTALLATION

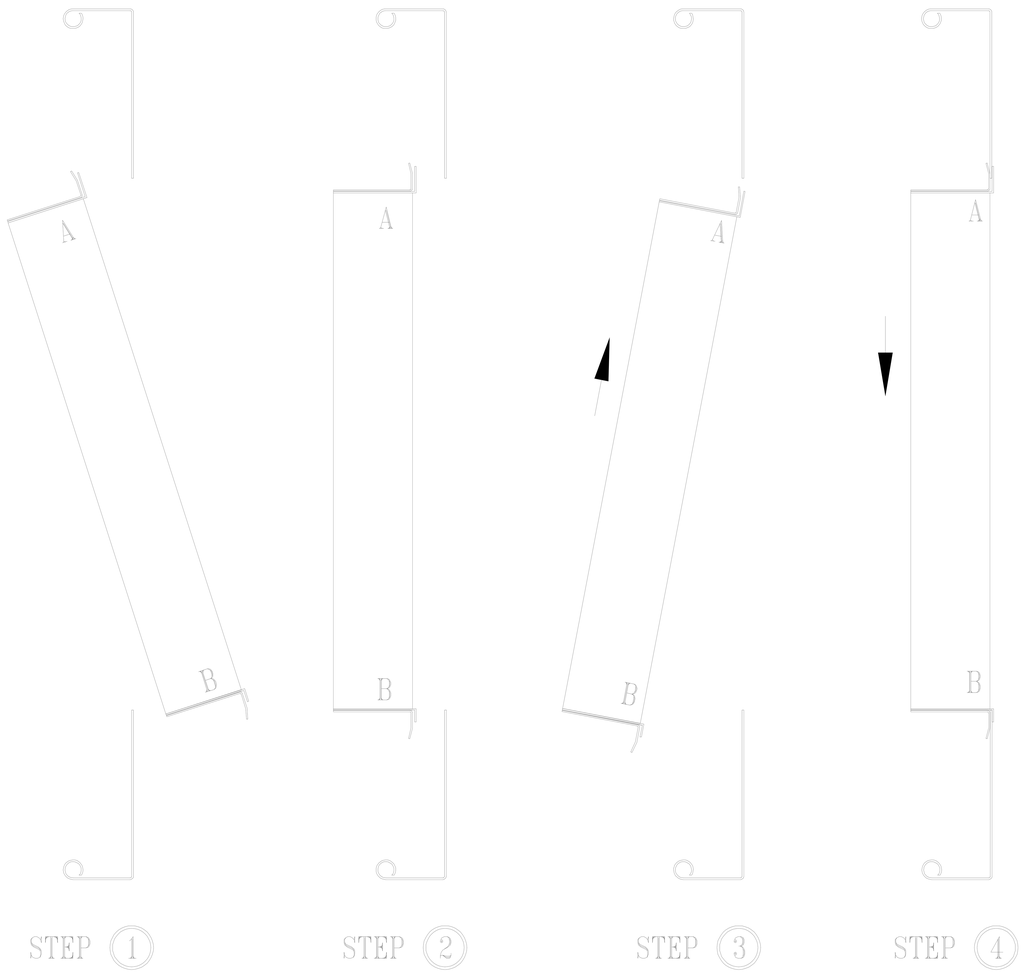

INSERT THE LIGHT FIXTURE IN THE OPENING OF THE PANEL WITH FLANGE 'A' UP. SLIDE FIXTURE UP UNTIL FLANGE 'B' ENGAGES THE LOWER EDGE OF THE OPENING IN THE PANEL. LOWER THE FIXTURE. BEND THE CORNER OF THE FLANGES IN AT THE SPOT MARKED 'X' TO SECURE FIXTURE.

SIDE PROFILES OF OPENING AND LIGHT FIXTURE
NOTE: DRAWING IS OUT OF PROPORTION

INSTALLATION REQUIREMENTS:

1. **LIGHT FIXTURE MUST BE LOCATED A MINIMUM OF 18" ABOVE FINISHED FLOOR.**
2. **FOR RETROFIT, CUT LIGHT OPENING IN PANEL 18" x 50 1/4"**

FRONT PROFILE OF LIGHT FIXTURE
NOTE: DRAWING IS OUT OF PROPORTION

FLUORESCENT LIGHT FEATURES:

- **A baked white enamel finish that creates a durable, highly reflective fixture**
- **120/277 dual voltage**
- **Energy Efficient T-8, 32 Watt electronics ballasts**
- **Rated Class I, Division 2, Groups A, B, C, and D**
- **ETL and ETL-C listed**
- **Interlock Safety Switch**
- **Enclosed & gasketed**
- **Twist-in lamp holders**
- **Inside access**
- **Allows easy retrofits**

BARRIE, ONTARIO, CANADA
OSSEO, WISCONSIN, USA
DALLAS, TEXAS, USA
PHONE: 1-800-468-5872 or 1-800-848-8738

GLOBAL FINISHING SOLUTIONS™

IMPORTANT NOTE: This print is the confidential property of Global Finishing Solutions L.L.C. It is not to be used or reproduced in any manner, nor submitted to other parties for examination without the prior approval of Global Finishing Solutions L.L.C.

© GLOBAL FINISHING SOLUTIONS L.L.C. 2003

REVISION		
REV:	DATE:	BY:
REV:	DATE:	BY:

DESCRIPTION			
FLUORESCENT LIGHT INSTALLATION			
SCALE: None	DATE: 1-27-04	DRAWN BY: DWQ	REVIEWED BY:
DRAWING NUMBER LABW12-6		SHEET 1 of 2	

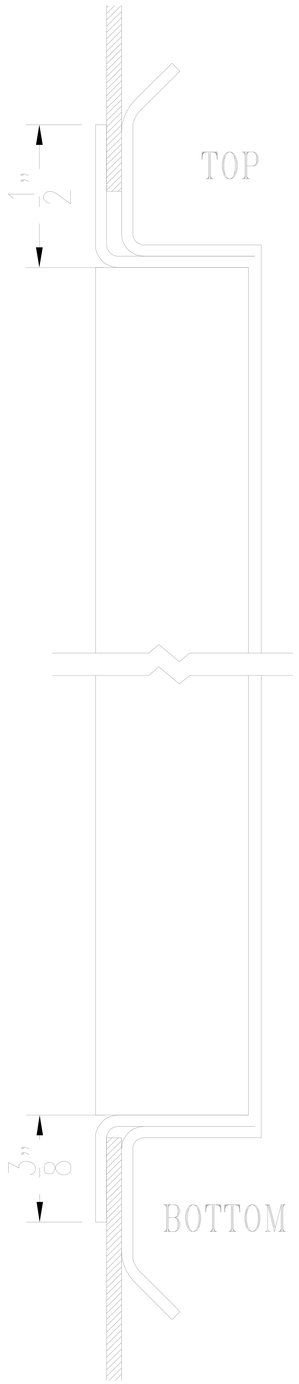

SOLENOID VALVE REQUIRED
FOR THIS INSIDE ACCESS LIGHT,
BUT IS NOT INCLUDED WITH LIGHT

NOTE:

INSTALL CAGE NUTS INTO LIGHT FIXTURE AS SHOWN IN DETAIL BELOW.

WHEN INSTALLING LIGHT FIXTURE (BOX PART) :

START WITH ROLLED EDGE FACING AWAY.

SLIDE LIGHTING FIXTURE BOX INWARD AND UPWARD SO THAT THE 2 FLANGES ON THE TOP OF THE LIGHT FIXTURE BOX ARE ON EITHER SIDE OF THE LIGHT PANEL.

THEN STRAIGHTEN THE LIGHT FIXTURE BOX AND SLIDE IT DOWN SO THAT THE 2 BOTTOM FLANGES ARE ON EITHER SIDE OF THE LIGHT PANEL.

THE LIGHT FIXTURE COVER IS ATTACHED USING
(8) 6mm x 20mm CAP HEAD SCREWS.
(THESE ARE LOCATED UNDER THE BALLAST COVER.)

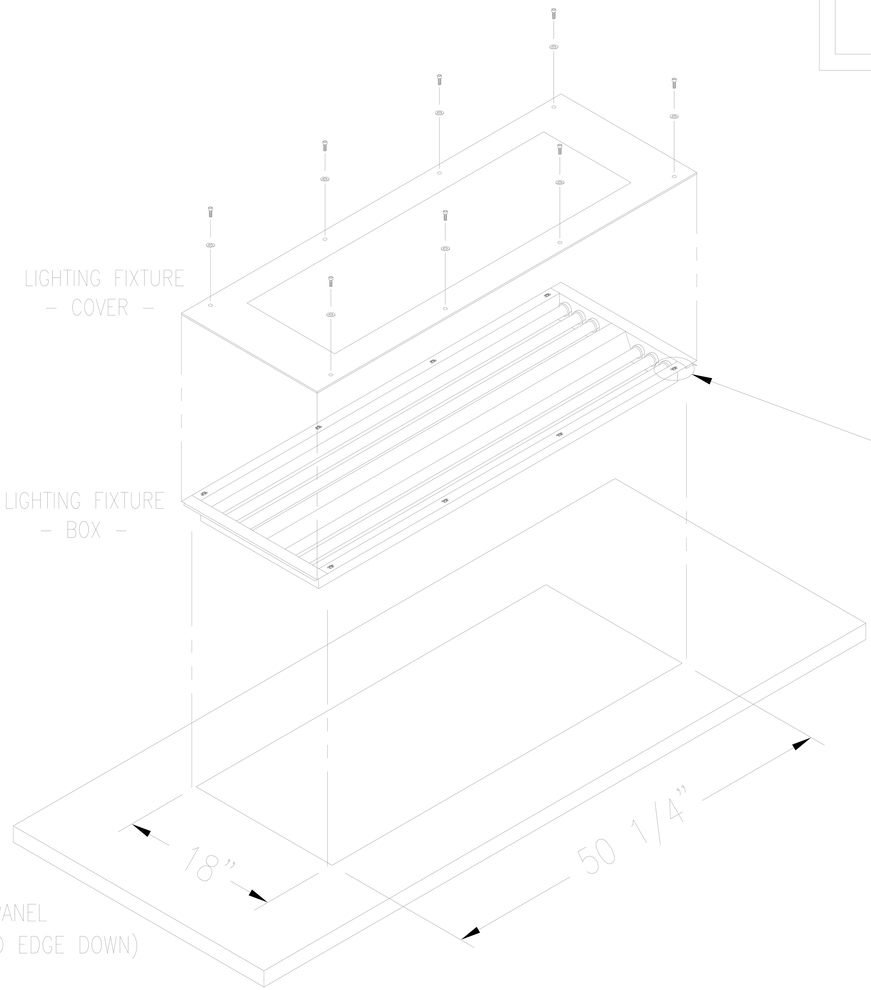

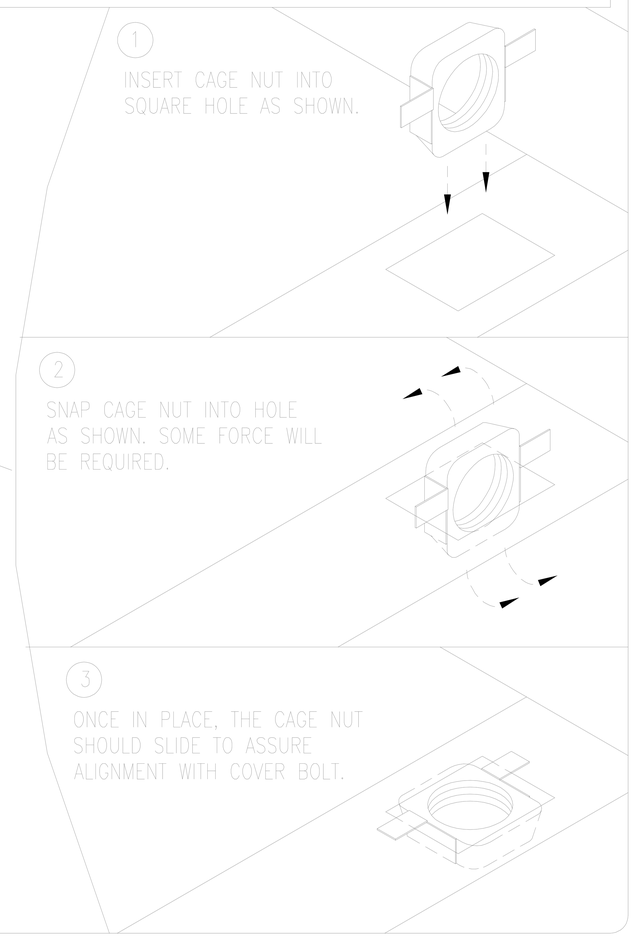

BARRIE, ONTARIO, CANADA
OSSEO, WISCONSIN, USA
DALLAS, TEXAS, USA
PHONE: 1-800-468-5872 or 1-800-848-8738

GLOBAL FINISHING SOLUTIONS™

IMPORTANT NOTE: This print is the confidential property of Global Finishing Solutions L.L.C. It is not to be used or reproduced in any manner, nor submitted to other parties for examination without the prior approval of Global Finishing Solutions L.L.C.

© GLOBAL FINISHING SOLUTIONS L.L.C. 2003

REVISION

REV:	DATE:	BY:
REV:	DATE:	BY:

DESCRIPTION

FLUORESCENT LIGHT INSTALLATION

SCALE:	DATE:	DRAWN BY:	REVIEWED BY:
None	1-27-04	DWQ	

DRAWING NUMBER

LABW12-6

SHEET

2 of 2